


Accessory	Application	Publication No.
CUSTOM SEAT P/N 08R76-MKC-A00	GL1800/D/DA GL1800B/BD	MII 16426
		Issue Date
		January 2018

**Honda Dealer: Please give a copy of these instructions to your customer.**

## PARTS LIST

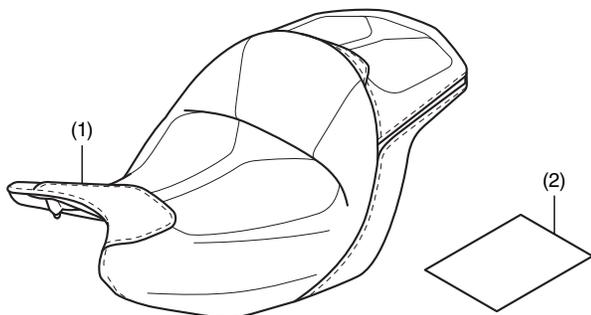

No.	Description	Qty
(1)	Custom seat	1
(2)	Installation Instructions URL	1

## TORQUE CHART

Refer to the Service Manual for the torque values of the removed parts.

## INSTALLATION

### ⚠ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


### NOTE:

- Disconnect the negative (-) cable from the battery before installing this accessory.
- The clock memory will be erased when you disconnect the battery. Reset the memories after reconnecting the battery.
- Reinstall the removed parts on the motorcycle and make sure that the wires and harnesses are not pinched.


- Open the left saddlebag lid as shown.

- Repeat on the right side.


<Left side>

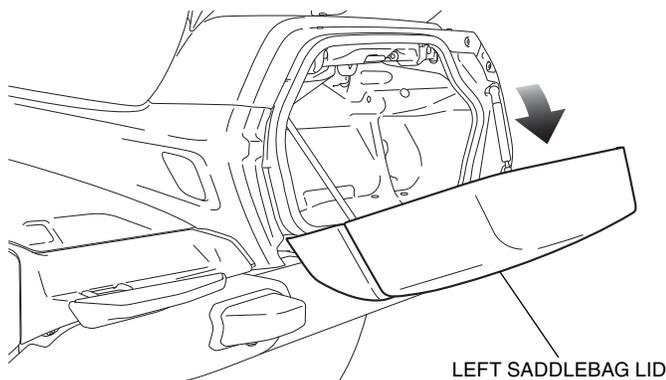

- Remove the left side cover as shown, and disconnect the negative (-) cable of the battery.

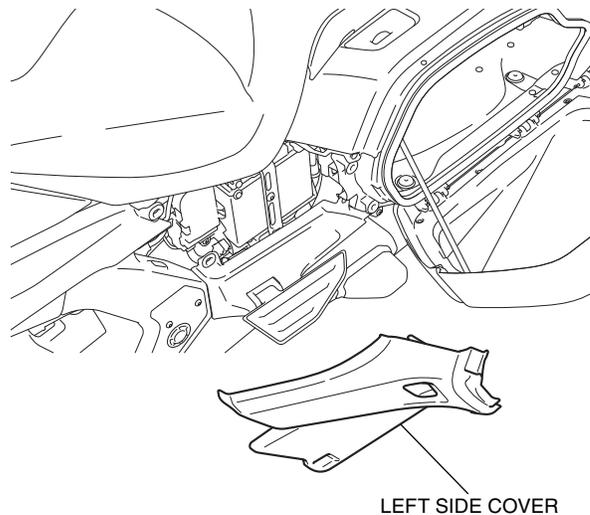

- Remove the right side cover in the same manner as the left side.
- Remove the seat as shown.
  - Disconnect the connector for GL1800/D/DA.

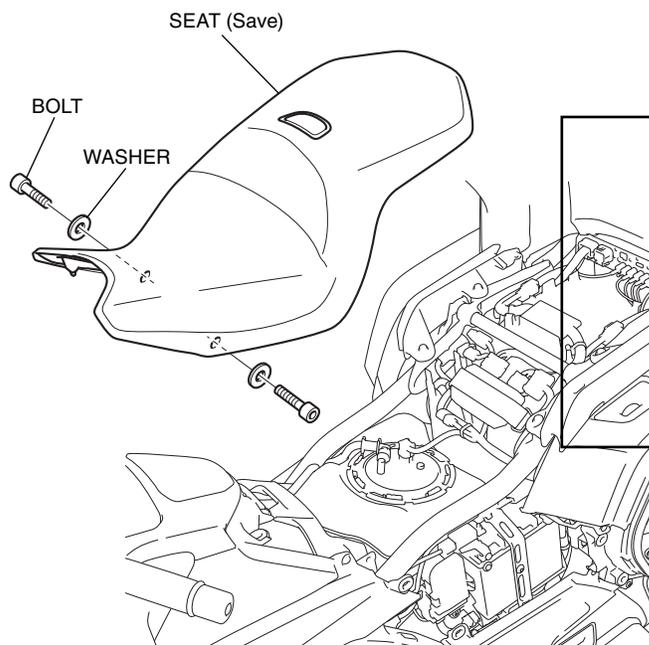

- Install the custom seat in the reverse order of removal.
- Install the motorcycle's parts in the reverse order of removal.
  - Confirm that any wire harness is not caught or too tight.